




Features

- ✓ **Heat sink design** better for air convection, good heat dissipation.
- ✓ **Bridgelux COB LED**, up to 75 lm/W, CRI 90+.
- ✓ **Dimming capability**. Suits triac dimmers including OPUS, Clipsal, HPM, Niko, Lumeo Domus, Lumeo Eco. The driver with SAA, RCM and CE certification.

Specifications


Model	MD04-13	
Voltage	AC200-240V 50/60Hz	
Power	13W	
LED	Bridgelux COB LED	
CCT	1800K-3000K	
Luminous Flux	3000K	920lm
Efficiency	75 lm/W	
CRI	90+	
Beam Angle	Lens 15°/24°/36°/60°	
Dimmable	Yes, leading edge, trailing edge and universal	
IP Rated	IP20	
Lifespan	>40,000Hrs	
Dimension	Ø49.8*H68mm	
Packaging	L130*W80*H110mm	
Carton	L54*W41.5*H35CM, 60pcs/CTN	
Warranty	3 years	




Technical Data Test

15D-3000K


GO1900L GONIOPHOTOMETER Test Report



Average Illuminance Figure



Light Source Test Report

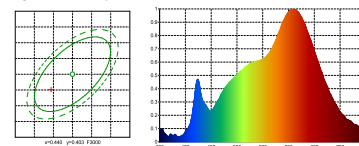


24D-3000K


GO1900L GONIOPHOTOMETER Test Report



Average Illuminance Figure




Light Source Test Report

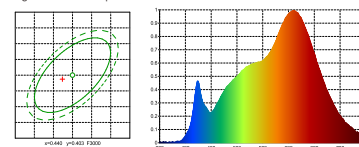


36D-3000K


GO1900L GONIOPHOTOMETER Test Report



Average Illuminance Figure




Light Source Test Report

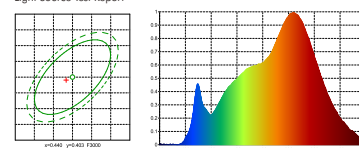


60D-3000K

GO1900L GONIOPHOTOMETER Test Report



Average Illuminance Figure



Light Source Test Report

