


Features

- ✓ **Heat sink design** with Pre-Set color temperature button, Tri-color design.
- ✓ **SMD LED**, up to 89 lm/W, CRI 80+.
- ✓ **Dimming capability**. Suits triac dimmers including OPUS, Clipsal, HPM, Niko, Lumeo Domus, Lumeo Eco. The driver with SAA, RCM and CE certification.



Specifications


Model	PRO-DL28CCTSMD	
Voltage	AC200-240V 50/60Hz	
Power	28W	
LED	SMD LED	
Luminous Flux	3000K	2155 lm
	4000K	2400 lm
	5000K	2350 lm
Efficiency	73 lm/W-89 lm/W-80 lm/W(3000K-4000K-5000K)	
CRI	80+	
Beam Angle	120°	
Dimmable	Yes	
IP Rated	IP40	
Lifespan	>40,000Hrs	
Cut-out	Ø200-210mm	
Dimension	Ø228*H45.5mm	
Packaging	L245*W235*H100mm	
Carton	L72.5*W26.5*H52.5CM, 15pcs/CTN	
Warranty	3 years	

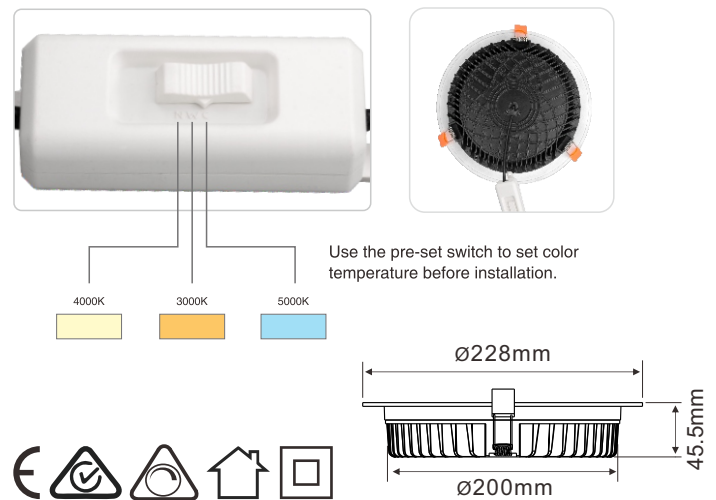


Technical Data Test

120D-3000K


GO1900L GONIOPHOTOMETER Test Report




Average Illuminance Figure



Light Source Test Report




SDCM : 2.2 SDCM




120D-4000K


GO1900L GONIOPHOTOMETER Test Report




Average Illuminance Figure



Light Source Test Report




SDCM : 4.3 SDCM




120D-5000K


GO1900L GONIOPHOTOMETER Test Report



Average Illuminance Figure



Light Source Test Report



SDCM : 3.4 SDCM

