

## Features


- ✓ **New design**, super slim to 42mm height.
- ✓ Up to 91 lm/W, CRI 80+.
- ✓ **Dimming capability**. Suits triac dimmers including OPUS, Clipsal, HPM, Niko, Lumeo Domus, Lumeo Eco. The driver with SAA, RCM and CE certification.
- ✓ **IP54** rated.

## Specifications

Model	PRO-CLR18CCT	
Voltage	AC200-240V 50/60Hz	
Power	18W	
LED	SMD LED	
Luminous Flux	3000K	1480lm
	4000K	1560lm
	5000K	1520lm
Efficiency	84 lm/W-91 lm/W-87 lm/W(3K-4K-5K)	
CRI	80+	
Beam Angle	120°	
Dimmable	Yes	
IP Rated	IP54	
Lifespan	>40,000Hrs	
Dimension	Ø300*H42mm	
Inner Box	L304*W56*H307mm	
Carton	L58.5*W31.7*H32.7CM, 10pcs/CTN	
Warranty	3 years	



Use the pre-set switch to set color temperature before installation.




Pre-set




## Technical Data Test

### 120D-3000K


#### GO1900L GONIOPHOTOMETER Test Report



#### Light Source Test Report

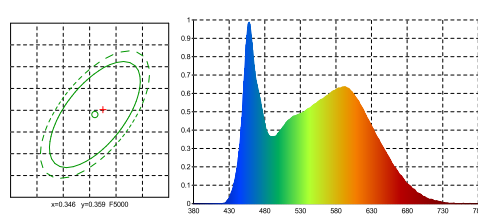


#### Average Illuminance Figure

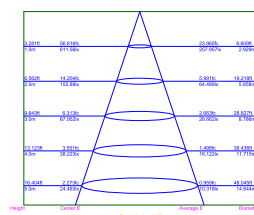


### 120D-4000K


#### GO1900L GONIOPHOTOMETER Test Report



#### Light Source Test Report

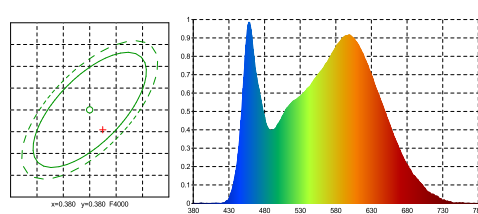


#### Average Illuminance Figure

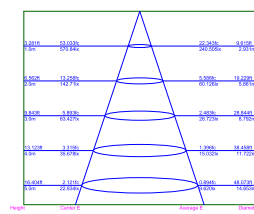


### 120D-5000K

#### GO1900L GONIOPHOTOMETER Test Report



#### Light Source Test Report

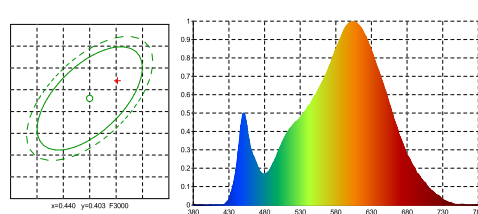

#### Average Illuminance Figure

