


PRO-SERIES SAND BLAST REFLECTOR SERIES (22W 28W 38W 50W 60W 70W)



8 Inch Sand Blast Reflector Series



Features

- Using **CITIZEN** COB LED chip for high brightness, low light decline and long-life performance
- Pure aluminium housing, anodised finish, architectural design features
- First optics to use PET reflector, mirror-finish anodised, reflective rate >95%
- Second optics to use 1090 reflector, sand blast finish, comfortable light performance
- CRI>83
- 3-years warranty

Application

- Commercial lighting – Offices, high ceiling spaces, shopping malls, museums, galleries, theatres, public spaces etc
- Industrial lighting

Standards

- Lamp: CE, SAA, ROHS
- Driver: TUV, CB, SAA, ROHS
 - 50-70W using Tridonic or Meanwell driver, 5-year warranty
 - DALI driver available

Temperature

- Ambient operating temperature: -20°C ~ +40°C
- Storage temperature: -30°C ~ +60°C

Finish Colour





White Face



Silver Face



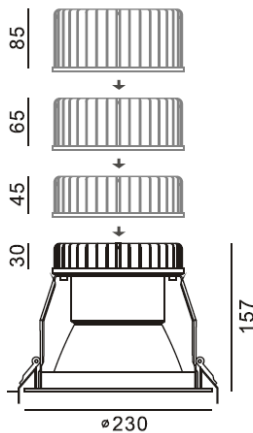


8 Inch Downlight outperforms 35w/ 70w/ 150w Metal Halide downlight


Model No.	LED Brand	Input Current	System Power	Luminous Flux	CRI	CCT	PFC
DLC0822-B830(X)	CITIZEN	520mA	22W	1716 lm	83	3000K	≥0.95
DLC0822-B840(X)	CITIZEN	520mA	22W	1780 lm	83	4000K	≥0.95
DLC0828-B830(X)	CITIZEN	700mA	28W	2259 lm	83	3000K	≥0.95
DLC0828-B840(X)	CITIZEN	700mA	28W	2373 lm	83	4000K	≥0.95
DLC0838-B830(X)	CITIZEN	900mA	38W	3067 lm	83	3000K	≥0.95
DLC0838-B840(X)	CITIZEN	900mA	38W	3211 lm	83	4000K	≥0.95
DLC0850-B830(X)	CITIZEN	1200mA	50W	3817 lm	83	3000K	≥0.95
DLC0850-B840(X)	CITIZEN	1200mA	50W	3926 lm	83	4000K	≥0.95
DLC0860-B830(X)	CITIZEN	1400mA	60W	4560 lm	83	3000K	≥0.95
DLC0860-B840(X)	CITIZEN	1400mA	60W	4680 lm	83	4000K	≥0.95
DLC0870-B830(X)	CITIZEN	1700mA	70W	5246 lm	83	3000K	≥0.95
DLC0870-B840(X)	CITIZEN	1700mA	70W	5432 lm	83	4000K	≥0.95

X=F(ON-OFF) X=T(triac Dim) X=A(1-10V Dim) X=D(DALI Dim) X=N(Without Driver)


Photometric Diagram




50W 3000K 50°



50W 3000K 50°



70W 3000K 50°



70W 3000K 50°

LED Driver

■ External Driver ■ Non Dim/Triac Dim/1-10V Dim/DALI Dim for options ■ Standard driver (Tridonic or Meanwell driver for option, 5 years warranty)