


LED PANEL TROFFER RANGE



600 x 600 TROFFER


Product Code	PRO-PNL660-45NW
Power Consumption (W)	43W
Beaming Angle (°)	100D
Luminous (lm)	4700lm
LED Chip	SMD2835
Color Temperature (K)	4000k
Color Rendering Index (Ra)	82
Power Factor	>0.95
Input Voltage (V)	200~240VAC
Dimension (mm)	596*596*55mm
Weight (g)	3.0kg
Housing	Coated Steel
Operating Temperature (°C)	-10~40°C
Certification	CE TUV EMC
Driver	SAA
Warranty	5 Years

Luminous Intensity Distribution Curve

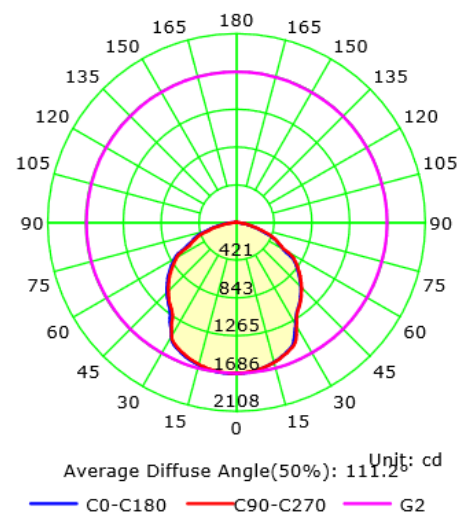

1200 x 600 TROFFER

Product Code	PRO-PNL126-90NW
Power Consumption (W)	90W
Beaming Angle (°)	100D
Luminous (lm)	8500lm
LED Chip	SMD2835
Color Temperature (K)	4000k
Color Rendering Index (Ra)	82
Power Factor	>0.95
Input Voltage (V)	200~240VAC
Dimension (mm)	1196*596*55mm
Weight (g)	6.0kg
Housing	Coated Steel
Operating Temperature (°C)	-10~40°C
Certification	CE TUV EMC
Driver	SAA
Warranty	5 Years

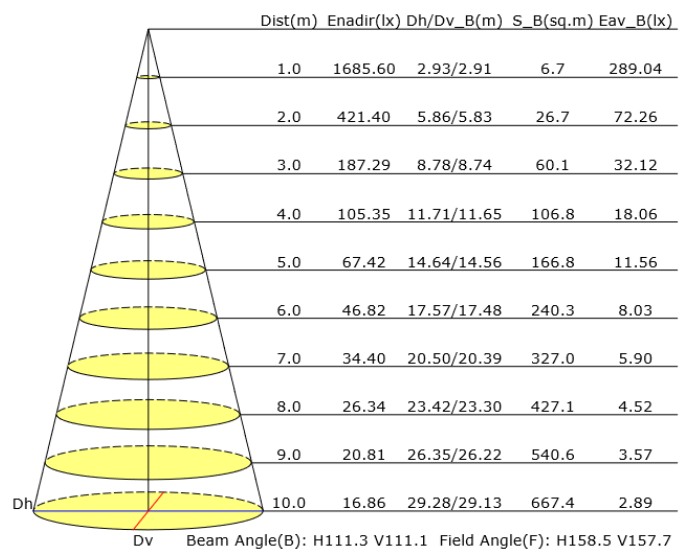

*IES and Datasheet files available on request
 **Other size and models available on request